

# ACCESSORIES / ACCESSOIRES / ZUBEHÖR

## MICRO SENSOR / MICRO CAPTEUR / MIKRO SCHALTER

### HP220

Connection:  
PVC Cable -20°C to 105°C  
(-4°F to +221°F)  
PCB -40°C to 105°C  
(-4°F to +221°F)

Protection Class:  
I 250V  
II / III 24V

Dimensions:  
(Cable) 1000 mm  
(Box) 30 x 27 x 16 mm

**Connexion:**  
**Câble PVC -20°C à 105°C**  
(-4°F à +221°F)  
**PCB -40°C à 105°C**  
(-4°F à +221°F)

**Classe de Protection:**  
I 250V  
II / III 24V

**Dimensions:**  
(Câble) 1000 mm  
(Boîte) 30 x 27 x 16 mm

**Anschluss:**  
PVC Kabel -20°C bis 105°C  
(-4°F bis +221°F)  
PCB -40°C bis 105°C  
(-4°F bis +221°F)


**Schutzklasse:**  
I 250V  
II / III 24V

**Abmessungen:**  
(Kabel) 1000 mm  
(Abmessungen) 30 x 27 x 16 mm



## COUNTER VIEW / COMPTEUR DE CYCLES / ZYKLUSZÄHLER

### HPCCM

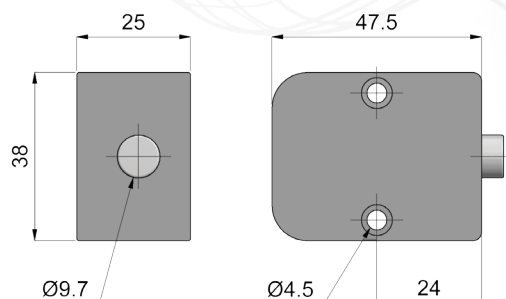

## BS RINGS / BAGUE BS / BS DICHTUNGEN

Thread	Max. Ø	Part-number
1/8	15.88	BAGUE BS18
1/4	20.57	BAGUE BS14
3/8	23.80	BAGUE BS38
1/2	28.58	BAGUE BS12
3/4	34.92	BAGUE BS34
1"	42.80	BAGUE BS100

